




Click here to
**REQUEST
INFORMATION**



TOTEM Outdoor LED display

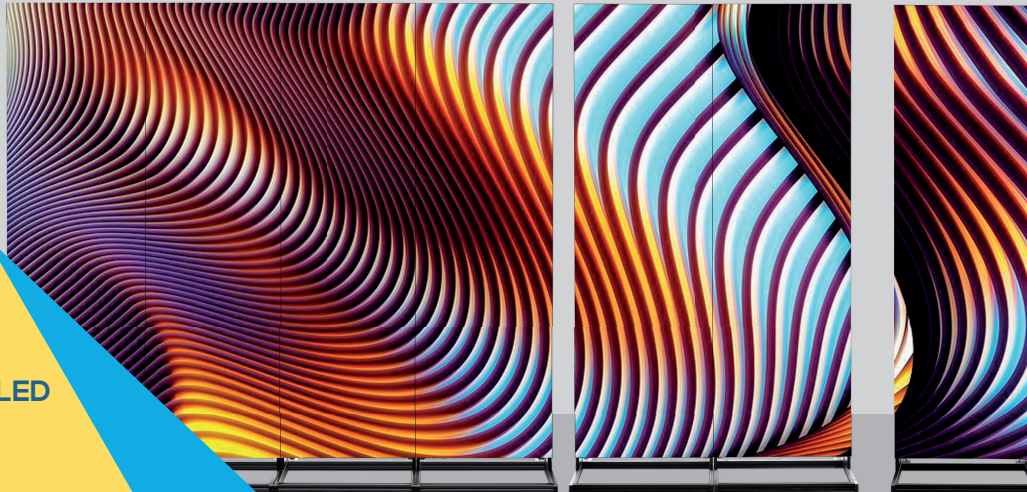

Outdoor digital LED
poster
LED banner

SHOPPING MALLS



HOTELS



BANK



BARS



STORES



HOSPITAL



RESTAURANTS



SCHOOL



EXHIBITIONS



EVENTS




The whole screen has obtained CE and ROHS certificates and passed the FCC test.

Totem LED display is designed to meet the standard of Europe and the USA.

After you send the program, the LED poster can automatically play video, pictures, text, and other programs once you connect the plug.



SMART CONTROL

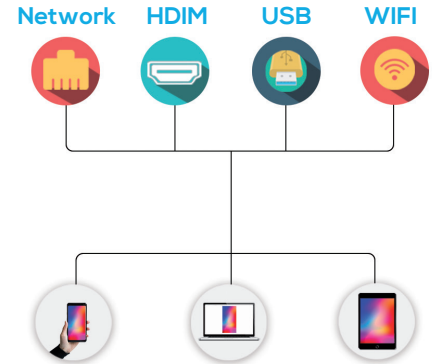


- Synchronous And Asynchronous Dual-mode Media
- Real-time Zoom In And Out
- 8 GB Memory
- Supports USB Expansion


▶ MULTIPLE INSTALLATION METHOD

It's easy to adjust the screen size by using different quantity of Portable led posters.


Standing
▽

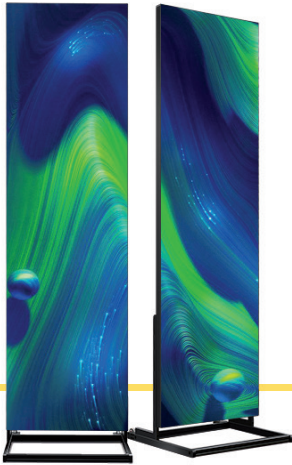

Hanging
▽

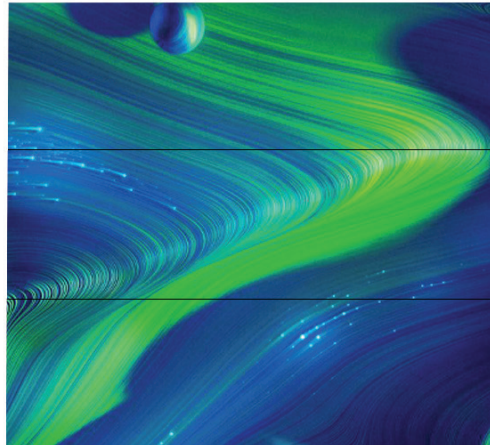


Creative Stitching
▽

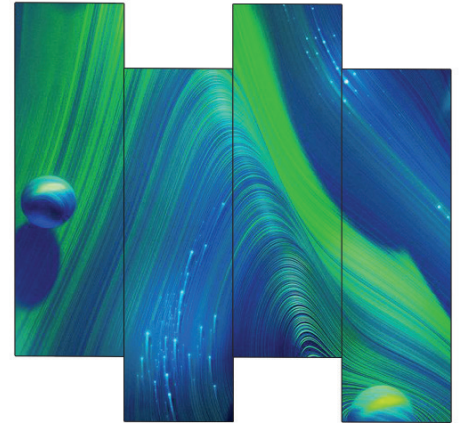

LIGHT WEIGHT & ULTRA - THIN




- LIGHTWEIGHT
- THIN FRAME
- EASY TO MOVE



38 KG



▶ EXTERNAL DEVICE COMPATIBLE

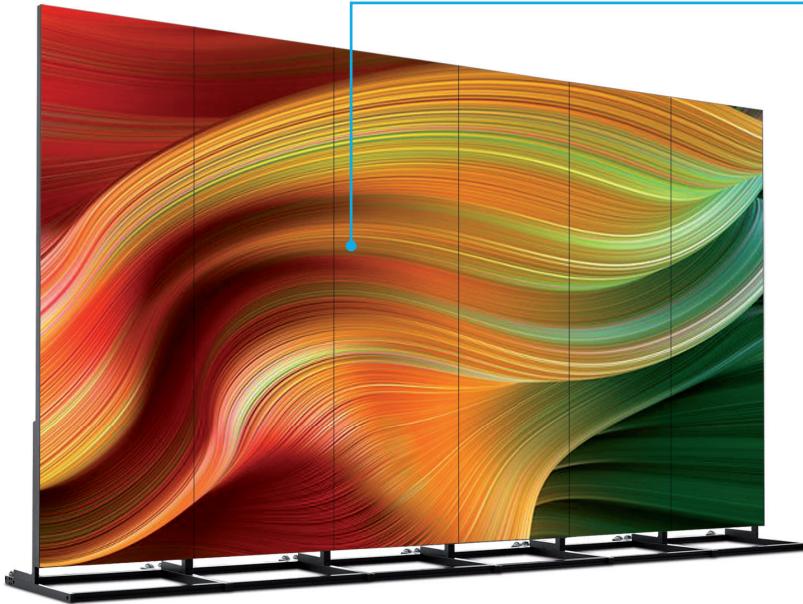

Connect the external light sensor to automatically adjust the screen brightness according to the environment

▼
Energy Saving

Connect with the speaker

▼
Make Your Ads Impressive And Unforgettable

Support interactive function(customizable)


▼
Better Advertising Effect

SERVICE



We have a stable supply chain system. Which not only guarantees the product quality but is also more competitive in terms of lead time.

We will do our best to meet your project requirements.

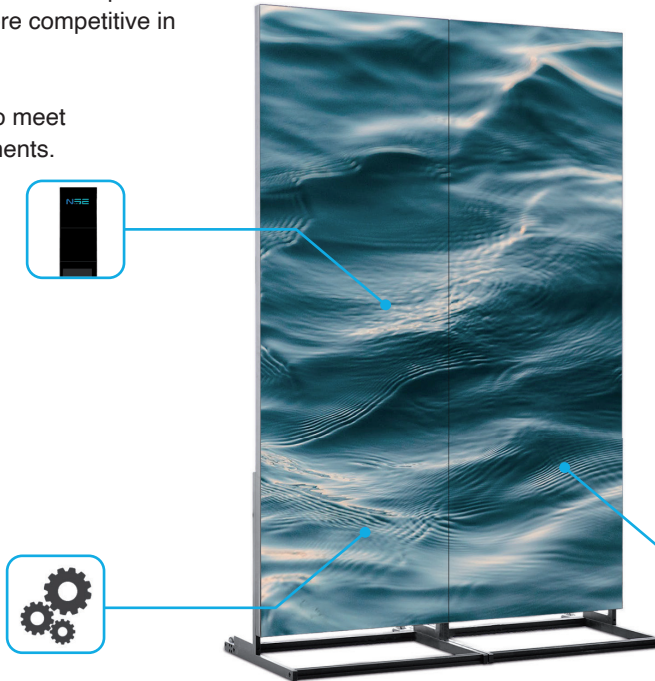

Hot-selling items are always in stock

▼
Customers don't have to wait for more than 10 days of production time.

We have freight forwarders that have cooperated for many years

▼
Give the most cost-effective freight plan faster.

- CUSTOM SIZE
- OPERATING SYSTEM



SPECIFICATION

Model Type	P2.5 - 640x1920 mm	P3 - 576x1920 mm	P3 - 768x1920 mm
Application	Outdoor	Outdoor	Outdoor
Pixel pitch	2.5mm	3mm	3 mm
Density	160000	111111	111111
LED Type	SMD1415	SMD1921	SMD1921
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	160 x 160mm	192 x 192 mm	192 x 192 mm
Module Resolution	64 x 64 pixel	64 x 64 pixel	64 x 64 pixel
LED Module layout(W×H)	4 x 12mm	3 x 10	4 x 10
Display Size	640*1920mm	576 x 1920mm	768 x 1920 mm
Display Resolution	256*768pixel	192 x 640pixel	256 x 640pixel
Display area	1.23m ²	1.11m ²	1.48m ²
Cabinet Size(mm)	643 x 1930mm	579 x 1930 mm	781 x 1930 mm
Resolution(W×H)	256 x 768	192x640	256 x 640
Case Material	Aluminum	Aluminum	Aluminum
Weight	45kg/unit	50kg /unit	55kg /unit
Drive mode	1/32scan	1/16scan	1/16scan
Viewing Distance	>2m	>3m	>3m
Brightness	5000 cd/m ²	5000 cd/ m ²	5000 cd/ m ²
Viewing Angle	140°/140°	140°/140°	140°/140°
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz
Input voltage	AC 240/100±10%	AC 240/100±10%	AC 240/100±10%
Maximum Power Consumption	1350W	1050W	1400W
Average Power Consumption	450W	315W	420W
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous(WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-10°~+40°	-10°~+40°	-10°~+40°
Working Humidity	10%-90%	10%-90%	10%-90%
IP Rating	IP65	IP65	IP65
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC

NSELED Europe srl
 Via Marco d'Agiate, 41/B
 20139 Milano Italia
 info@nseled.eu
 T. 02 40707210



For more information
www.nseled.eu

